


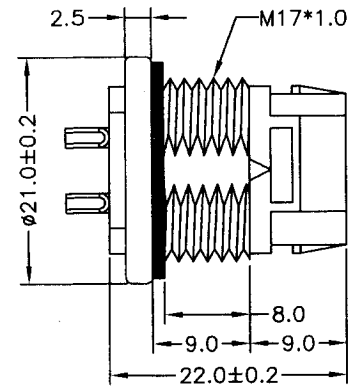
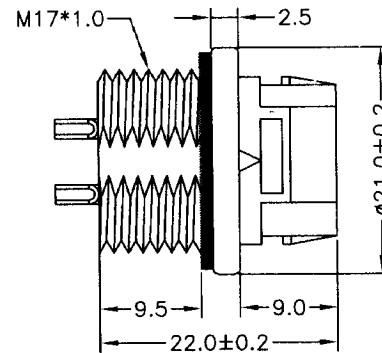



P/N: LJ125180SM-XX-PI-D
MOUNT INNER TYPE 內鎖

P/N: LJ125180SM-XX-PE-D
MOUNT OUTER TYPE 外鎖



MATERIAL

Insulator: NYLON66 UL94V-0 +GF Black
Contact: Brass Gold 2u" over nickel plated

SPECIFICATIONS


Current Rating:

LJ125180SM=2~3P(10A AC, DC)

LJ125100SM=4~6P(5A AC, DC)

LJ125210SM=2+5P(7A+3A)

LJ125075SM=7~18P(2A AC, DC)



RECOMMENDED PANEL CUT-OUT

Applicable Panel Board Thickness:

2.0~4.0mm

ORDER CODE

LJ125180SM - XX - PE - D

SERIES OPTION


NO. OF CONTACT

PE=MOUNT OUTER TYPE

PI=MOUNT INNER TYPE

D=W/DUST COVER

N=W/O DUST COVER

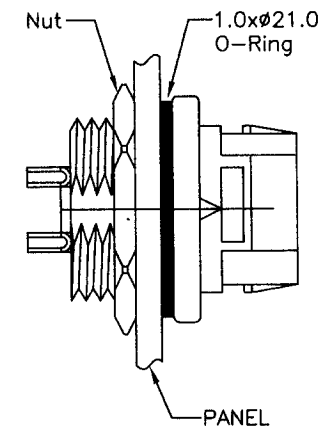

Panel Assembly Type

CIRCUITS	2P	3P	4P	5P	6P	2+5P	18P
ARRANGEMENT OF CONTACT							
SERIES	LJ125180SM-02	LJ125180SM-03	LJ125100SM-04	LJ125100SM-05	LJ125100SM-06	LJ125210SM-07	LJ125075SM-18

詮盛企業股份有限公司

CHIEN SHERN ENTERPRISE CO.,LTD.

TITLE

QUICK PULL IN-OUT WATER PROOF
MALE PIN PANEL MOUNT INNER&OUTER TYPE

PART NO.

LJ125XXXSM-XX-PE-D

DWG.NO.

LJ125XXXSM-XX-PE-D

TOLERANCE

DIM.

.0 ±0.30

.00 ±0.20

.000 ±0.10

DRAWN

CHECK

APPROVE

SCALE

許建華

DATE

2011.05.25

DATE

DATE

UNIT

mm

REV.

01