


SERIES 66J5 66J6 .051" (Ø1.3m/m) Wire-to-wire Connectors

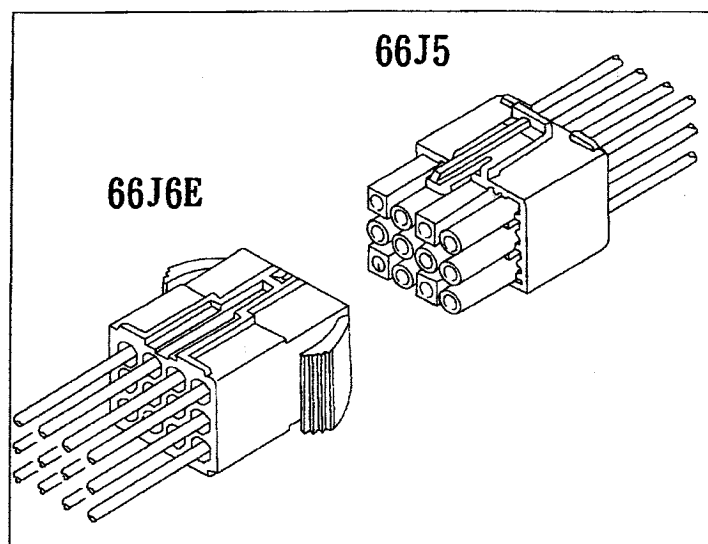


SPECIFICATIONS

- ★ Circuit: 2, 3, 4, 6, 9, 12, 15
- ★ Voltage rating: 300V AC, DC
- ★ Current rating: 6A AC, DC
- ★ Withstanding voltage: 1500V AC/minute
- ★ Insulation resistance: 1000M Ω min
- ★ Temperature range: -25°C ~ +85°C
- ★ Unit(單位): m/m
- ★ Material(材質): UL94V-0 nylon 66
- ★ Tolerance(公差) ± 0.3 m/m

Part NO	WIRE RANGE	O.D.OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL
	AWG				
T66J5-A	20-16	1.9-3.4	BRASS	TIN-Plated	5000
T66J5-B	26-20	1.3-2.7	BRASS	TIN-Plated	7000

Part NO	WIRE RANGE	O.D.OF WIRE INSULATION	MATERIAL	PLATING	QUANTITY PER REEL
	AWG				
T66J6-A	20-16	1.9-3.4	BRASS	TIN-Plated	5000
T66J6-B	26-20	1.3-2.7	BRASS	TIN-Plated	7000

PART NO : T66J5 (A-高脚 High Heel)
(B-低脚 Low Heel)

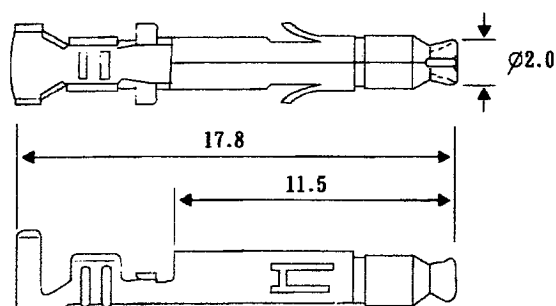

PART NO : T66J6 (A-高脚 High Heel)
(B-低脚 Low Heel)

