

.200"(5.08mm) Pitch Wire to Board Header Dip Type



CW5082 Series

- * Material: Insulator: Nylon 66 UL 94V-2 Natural
- * Contact: .045"(1.14mm) straight square pin
- * Tin plated brass pins.







SPECIFICATIONS

- * Current rating: 7A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -25°C~+105°C
- * Insulation resistance: 1,000M Ω min.
- * Withstand voltage: 1500V AC/minute
- * Applicable PC board thickness: .063"(1.6mm)

mm

P/N: CW5082S-XX

P/N: CW5082R-XX

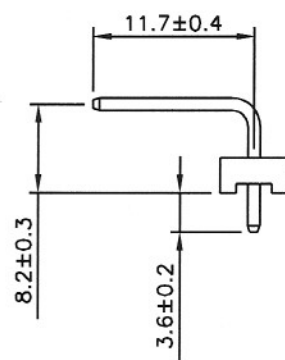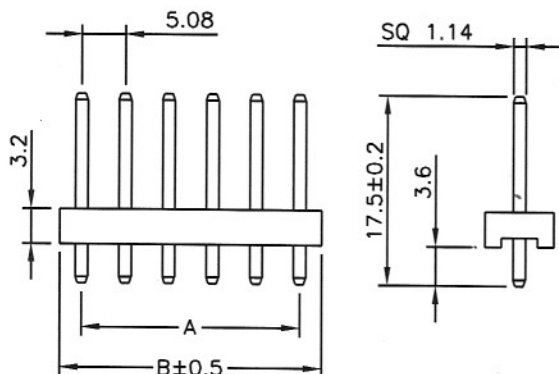

P.C Board Layout

P.C Board Layout

CIRCUITS	PART NO.	DIMENSION in.(mm)		CIRCUITS	PART NO.	DIMENSION in.(mm)	
		A	B			A	B
2	CW5082X-2P	5.08	10.16	7	CW5082X-7P	30.48	35.56
3	CW5082X-3P	10.16	15.24	8	CW5082X-8P	35.56	40.64
4	CW5082X-4P	15.24	20.32	9	CW5082X-9P	40.64	45.72
5	CW5082X-5P	20.32	25.40	10	CW5082X-10P	45.72	50.80
6	CW5082X-6P	25.40	30.48				