


.049"(1.25mm) pitch single row Headers DIP TYPE



- * Poles:2~15
 - * Material:Insulator:high tempera ture plastic UL94V-0
 - * Finished:phosphor bronze Tin-plated
 - * Mates with CH1251 series housing
- Specifications
- * Current rating: 1A AC, DC
 - * Voltage rating: 125V AC, DC
 - * Temperature range: -40°C~+85°C
 - * Insulation resistance: 100MΩ min.
 - * Withstand voltage: 250 AC/minute


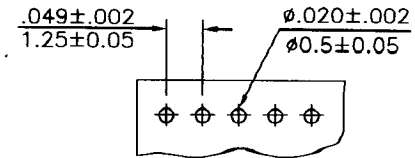


P.C. Board Layout

inches
mm



P/N:CW1251SP-XX

Straight Angle

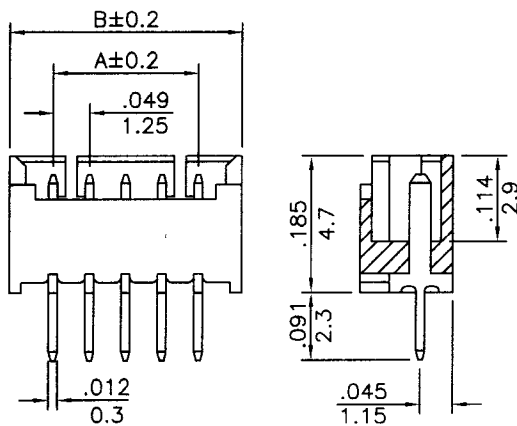

P/N:CW1251RP-XX

Right Angle

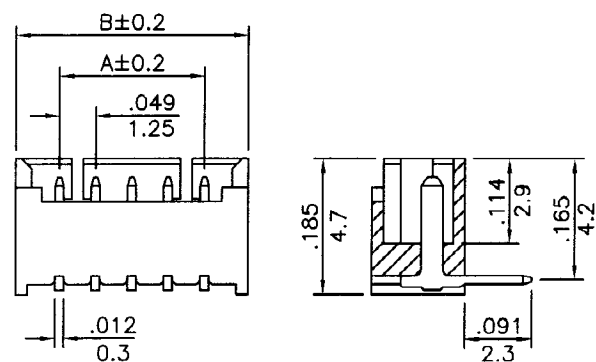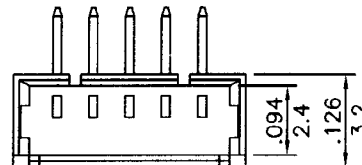

CIRCUITS	PART NO.	DIMENSION in.(mm)		CIRCUITS	PART NO.	DIMENSION in.(mm)	
		A	B			A	B
2	CW1251XP-02	0.049(1.25)	0.169(4.3)	9	CW1251XP-09	0.394(10.00)	0.512(13.0)
3	CW1251XP-03	0.098(2.50)	0.217(5.5)	10	CW1251XP-10	0.443(11.25)	0.563(14.3)
4	CW1251XP-04	0.148(3.75)	0.268(6.8)	11	CW1251XP-11	0.492(12.50)	0.610(15.5)
5	CW1251XP-05	0.197(5.00)	0.315(8.0)	12	CW1251XP-12	0.541(13.75)	0.661(16.8)
6	CW1251XP-06	0.246(6.25)	0.366(9.3)	13	CW1251XP-13	0.591(15.00)	0.709(18.0)
7	CW1251XP-07	0.295(7.50)	0.413(10.5)	14	CW1251XP-14	0.640(16.25)	0.760(19.3)
8	CW1251XP-08	0.344(8.75)	0.465(11.8)	15	CW1251XP-15	0.689(17.50)	0.807(20.5)