

.100"(2.54mm) pitch Wire to Board Connectors





CH330 Series

- * Poles : 2*2~2*40
- * Material : NORYL UL 94-V1 ,BLACK
- * Suitable CT328 or CT328B series terminal
- * Mates with CH330 FOR CW330 series header
CH330A series FOR CW2545 series header


Specifications

- * Current rating : 3A AC, DC
- * Voltage rating : 250V AC, DC
- * Temperature range : -25°C~+85°C
- * Insulation resistance : 1,000M Ω min.
- * Withstand voltage : 800V AC/minute



P/N : CH330-2xXX

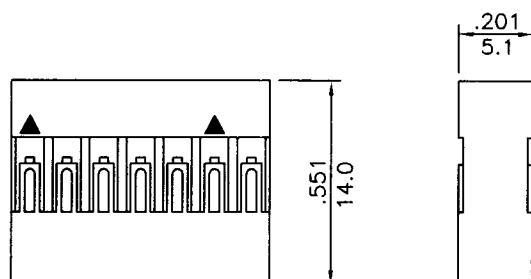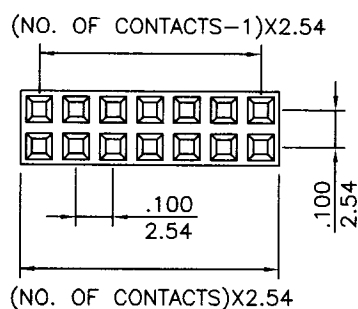

P/N : CK328X
Polarizing Plug

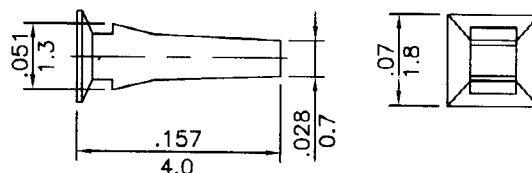


P/N : CH330A-2xXX

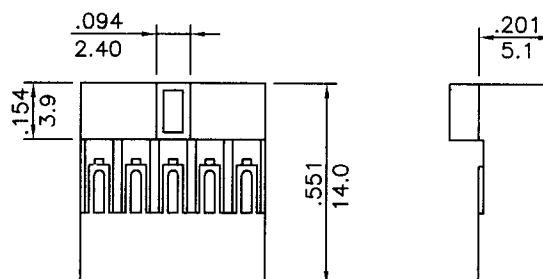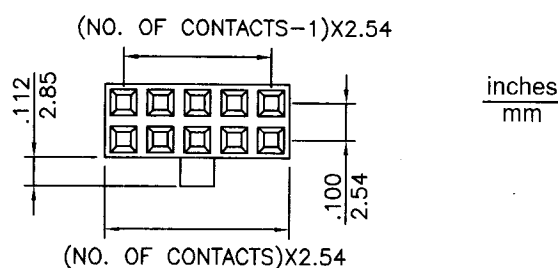


.100"(2.54mm) pitch crimp terminal

CT328 Series



- * Material : Brass
- * Finished : Tin plated or gold plated
- * Used in CH328, CH330 series housings
- * Wire range : AWG#22~#28
- * Insulation O.D : 1.70mm(max)
- * Thickness : 0.2mm
- * Q'TY:10,000pcs/reel

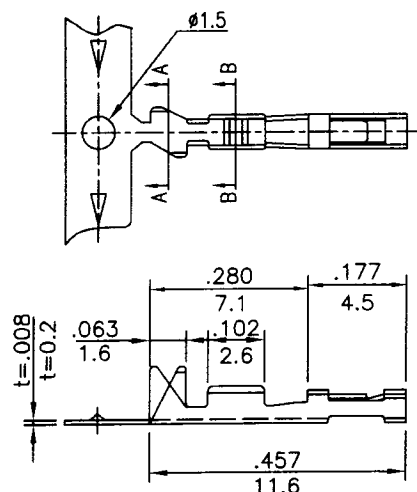

inches
mm



A-A SECTION



B-B SECTION