

.118"(3.00mm) pitch Connector System SMT Headers



W3045 SMT Series

- * Poles: 2-24
 - * Material: Insulator: High Temp LCP UL94V-0 BLACK
 - * Contact: Brass Tin plated
 - * Mates with CH3025 series Housing
- Specifications**
- * Current rating: 5A AC, DC
 - * Voltage rating: 250V AC, DC
 - * Temperature range: -40°C~+105°C
 - * Insulation resistance: 1,000MΩ min.
 - * Withstand voltage: 1500V AC/minute

inches
mm

ORDERING CODE

W3045XT-2x12 N T R
1 2 3 4 5



1. SERIES NO. SMT TYPE
2. NO. OF CIRCUIT 2x1~2x12
3. OTHER OPTIONS
N=SURFACE MOUNT WITH NAIL
C2=WITH CLIP 2.0, C3=WITH CLIP 3.2
4. CONTACT PLATED
T=TIN OVER NICKEL
5. PACKAGING
R=TAP&REEL

P/N: W3045ST-2xXXN

P.C.B LAYOUT

SMT WITH FITTING NAIL


(NO. OF CONTACTS-1)x3.0

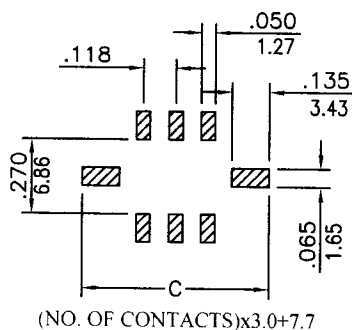



P/N: W3045RT-2xXXN

P.C.B LAYOUT

SMT WITH FITTING NAIL

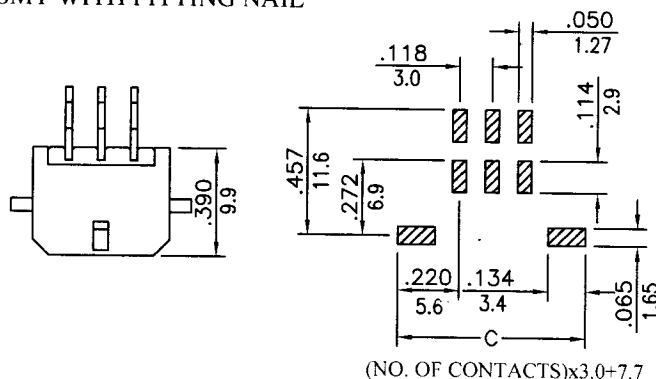

(NO. OF CONTACTS)x3.0+3.7



(NO. OF CONTACTS)x3.0+3.7

