

.118"(3.00mm) pitch Connector System SMT Headers



W3015 SMT Series

- * Poles: 2-12
- * Material: Insulator: High Temp Polyester ULV-0 BLACK
- * Contact: Brass Tin plated
- * Mates with CH3025S-XX series Housing

Specifications

- * Current rating: 5A AC, DC
- * Voltage rating: 250V AC, DC
- * Temperature range: -40°C~+105°C
- * Insulation resistance: 1,000MΩ min.
- * Withstand voltage: 1500V AC/minute

inches
mm

ORDERING CODE

W3015XT-03 N T R
1 2 3 4 5



1. SERIES NO. SMT TYPE
2. NO. OF CIRCUIT 2~12
3. OTHER OPTIONS
N=SURFACE MOUNT WITH NAIL
C2= WITH CLIP 2.0, C3=WITH CLIP 3.2
4. CONTACT PLATED
T=TIN OVER NICKEL
5. PACKAGING
R=TAP&REEL

P/N: W3015ST-XXN

P.C.B LAYOUT

SMT WITH FITTING NAIL

(NO. OF CONTACTS-1)x3.0

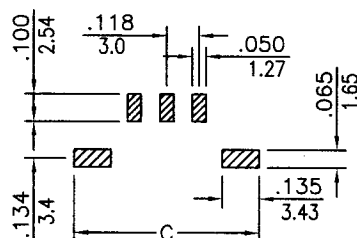



(NO. OF CONTACTS)x3.0+8.2

P/N: W3015RT-XXN



P.C.B LAYOUT

SMT WITH FITTING NAIL

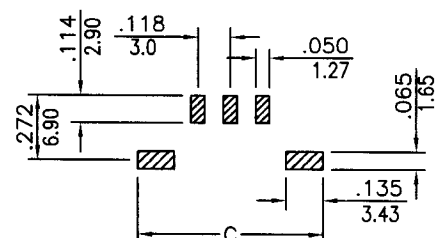



(NO. OF CONTACTS)x3.0+8.2

(NO. OF CONTACTS)x3.0+3.7



(NO. OF CONTACTS)x3.0+3.7



(NO. OF CONTACTS-1)x3.0